



## Series 4000-K

### Compact Modbus Power and Energy Meter

#### Product Overview

The Series 4000-K DIN rail meter provides a solution for measuring energy data with a single device. Inputs include control power, CT, and 3-phase voltage. The Series 4000-K supports multiple output options, including solid state relay contacts, Modbus, and pulse. The LCD screen on the faceplate allows instant output viewing.

The meter is housed in a plastic enclosure suitable for installation on T35 DIN rail according to EN50022. The Series 4000-K can be mounted with any orientation over the entire ambient temperature range, either on a DIN rail or in a panel. The meter is not sensitive to CT orientation to reduce installation errors.

#### Product Identification

Series 4000-K      Unidirectional metering, Modbus full data set, pulse and alarm outputs.

#### Specifications

| MEASUREMENT ACCURACY          |                                                                                                                                                                      |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Real Power and Energy         | IEC 62053-22 Class 0.5S, ANSI C12.20 0.5%                                                                                                                            |
| Reactive Power and Energy     | IEC 62053-23 Class 2, 2%                                                                                                                                             |
| Current                       | 0.4% (+0.015% per °C deviation from 25°C) from 5% to 100% of range; 0.8% (+0.015% per °C deviation from 25°C) from 1% to 5% of range                                 |
| Voltage                       | 0.4% (+0.015% per °C deviation from 25°C) from 90V <sub>L-N</sub> to 600VAC <sub>L-L</sub>                                                                           |
| Sample Rate                   | 2520 samples per second                                                                                                                                              |
| Data Update Rate              | 1 sec                                                                                                                                                                |
| Type of Measurement           | True RMS up to the 21st harmonic 60 Hz; One to three phase AC system                                                                                                 |
| INPUT VOLTAGE CHARACTERISTICS |                                                                                                                                                                      |
| Measured AC Voltage           | Minimum 90V <sub>L-N</sub> (156V <sub>L-L</sub> ) for stated accuracy;<br>UL Maximums: 600V <sub>L-L</sub> (347V <sub>L-N</sub> )<br>CE Maximum: 300V <sub>L-N</sub> |
| Metering Over-Range           | +20%                                                                                                                                                                 |
| Impedance                     | 2.5 MΩ <sub>L-N</sub> / 5 MΩ <sub>L-L</sub>                                                                                                                          |
| Frequency Range               | 45 to 65 Hz                                                                                                                                                          |
| INPUT CURRENT CHARACTERISTICS |                                                                                                                                                                      |
| CT Scaling                    | Primary: Adjustable from 5 A to 32,000 A                                                                                                                             |
| Measurement Input Range       | 0 to 0.333 VAC or 0 to 1.0 VAC (+20% over-range), rated for use with Class 1 voltage inputs                                                                          |
| Impedance                     | 10.6 kΩ (1/3 V mode) or 32.1 kΩ (1 V mode)                                                                                                                           |
| CONTROL POWER                 |                                                                                                                                                                      |
| AC                            | 5VA max.; 90V min.<br>UL Maximums: 600V <sub>L-L</sub> (347 V <sub>L-N</sub> )<br>CE Maximum: 300V <sub>L-N</sub>                                                    |
| DC*                           | 3 W max.; UL and CE: 125 to 300VDC                                                                                                                                   |
| Ride Through Time             | 100 msec at 120VAC                                                                                                                                                   |



#### **DANGER**

##### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Turn off all power supplying equipment before working on or inside the equipment.
- Follow safe electrical work practices. See NFPA 70E in the USA, or applicable local codes.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Read, understand and follow the instructions before installing this product.
- Product may use multiple voltage/power sources. Be sure all sources of power have been disconnected before servicing.
- Use a properly rated voltage sensing device to confirm power is off.
- DO NOT DEPEND ON THIS PRODUCT FOR VOLTAGE INDICATION
- Only install this product on insulated conductors.

Failure to follow these instructions will result in death or serious injury.

A qualified person is one who has skills and knowledge related to the construction and operation of this electrical equipment and the installation, and has received safety training to recognize and avoid the hazards involved. NEC2011 Article 100

No responsibility is assumed by Leviton for any consequences arising out of the use of this material.

Control system design must consider the potential failure modes of control paths and, for certain critical control functions, provide a means to achieve a safe state during and after a path failure. Examples of critical control functions are emergency stop and over-travel stop.

#### **WARNING**

##### LOSS OF CONTROL

- Assume that the system will reach a safe state during and after a control path failure.
- Separate or redundant control paths must be provided for critical control functions.
- Test the effect of transmission delays or failures of communication links.<sup>1</sup>
- Each implementation of equipment using communication links must be individually and thoroughly tested for proper operation before placing it in service.

Failure to follow these instructions may cause injury, death or equipment damage.

<sup>1</sup>For additional information about anticipated transmission delays or failures of the link, refer to NEMA ICS 1.1 (latest edition), *Safety Guidelines for the Application, Installation, and Maintenance of Solid-State Control* or its equivalent in your specific country, language, and/or location.

#### **CAUTION**

- This product is not intended for life or safety applications.
- Do not install this product in hazardous or classified locations.
- The installer is responsible for conformance to all applicable codes.
- Mount this product inside a suitable fire and electrical enclosure.

##### FCC PART 15 INFORMATION

NOTE: This equipment has been tested by the manufacturer and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifications to this product without the express authorization of the manufacturer nullify this statement.

For use in a Pollution Degree 2 or better environment only. A Pollution Degree 2 environment must control conductive pollution and the possibility of condensation or high humidity. Consider the enclosure, the correct use of ventilation, thermal properties of the equipment, and the relationship with the environment. Installation category: CAT II or CAT III. Provide a disconnect device to disconnect the meter from the supply source. Place this device in close proximity to the equipment and within easy reach of the operator, and mark it as the disconnecting device. The disconnecting device shall meet the relevant requirements of IEC 60947-1 and IEC 60947-3 and shall be suitable for the application. In the US and Canada, disconnecting fuse holders can be used. Provide overcurrent protection and disconnecting device for supply conductors with approved current limiting devices suitable for protecting the wiring. If the equipment is used in a manner not specified by the manufacturer, the protection provided by the device may be impaired.

## Specifications (cont.)


| <b>OUTPUT</b>                              |                                                                                                          |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>Alarm Contacts</b>                      | N.C., static output (30VAC/DC, 100mA max. @ 25°C, derate 0.56mA per °C above 25°C)                       |
| <b>Real Energy Pulse Contacts</b>          | N.O., static output (30VAC/DC, 100mA max. @ 25°C, derate 0.56mA per °C above 25°C)                       |
| <b>RS-485 Port</b>                         | 2-wire, 1200 to 38400 baud, Modbus RTU                                                                   |
| <b>MECHANICAL CHARACTERISTICS</b>          |                                                                                                          |
| <b>Weight</b>                              | 0.62 lb (0.28 kg)                                                                                        |
| <b>IP Degree of Protection (IEC 60529)</b> | IP40 front display; IP20 Meter                                                                           |
| <b>Display Characteristics</b>             | Back-lit blue LCD                                                                                        |
| <b>Terminal Block Screw Torque</b>         | 0.37 to 0.44 ft-lb (0.5 to 0.6 N·m)                                                                      |
| <b>Terminal Block Wire Size</b>            | 24 to 14 AWG (0.2 to 2.1 mm <sup>2</sup> )                                                               |
| <b>Rail</b>                                | T35 (35mm) DIN Rail per EN50022                                                                          |
| <b>OPERATING CONDITIONS</b>                |                                                                                                          |
| <b>Operating Temperature Range</b>         | -30° to 70°C (-22° to 158°F)                                                                             |
| <b>Storage Temperature Range</b>           | -40° to 85°C (-40° to 185°F)                                                                             |
| <b>Humidity Range</b>                      | <95% RH noncondensing                                                                                    |
| <b>Altitude of Operation</b>               | 3000 m                                                                                                   |
| <b>COMPLIANCE INFORMATION</b>              |                                                                                                          |
| <b>US and Canada</b>                       | CAT III, Pollution degree 2;<br>for distribution systems up to 347V <sub>L-N</sub> /600VAC <sub>LL</sub> |
| <b>CE</b>                                  | CAT III, Pollution degree 2;<br>for distribution systems up to 300V <sub>L-N</sub>                       |
| <b>Dielectric Withstand</b>                | Per UL 508, EN61010                                                                                      |
| <b>Conducted and Radiated Emissions</b>    | FCC part 15 Class B, EN55011/EN61000 Class B (residential and light industrial)                          |
| <b>Conducted and Radiated Immunity</b>     | EN61000 Class A (heavy industrial)                                                                       |
| <b>US and Canada (cULus)</b>               | UL508 (open type device)/CSA 22.2 No. 14-05                                                              |
| <b>Europe (CE)</b>                         | EN61010-1                                                                                                |

\* External DC current limiting is required, see fuse recommendations.


## Table of Contents

|                                                |    |
|------------------------------------------------|----|
| Dimensions                                     | 4  |
| Data Outputs                                   | 4  |
| Product Diagram                                | 5  |
| Display Screen Diagram                         | 5  |
| Installation                                   | 6  |
| Supported System Types                         | 7  |
| Wiring Symbols                                 | 7  |
| Wiring                                         | 8  |
| Control Power                                  | 9  |
| Quick Setup Instructions                       | 10 |
| Solid State Output                             | 11 |
| User Interface Menu Abbreviations Defined      | 11 |
| User Interface for Data Configuration          | 12 |
| Alert/Reset Information                        | 13 |
| User Interface for Setup                       | 14 |
| RS-485 Communications                          | 16 |
| Standard Modbus Default Settings               | 17 |
| Modbus Point Map Overview                      | 18 |
| Modbus Point Map                               | 19 |
| Troubleshooting                                | 24 |
| China RoHS Compliance Information (EFUP Table) | 24 |


## Dimensions

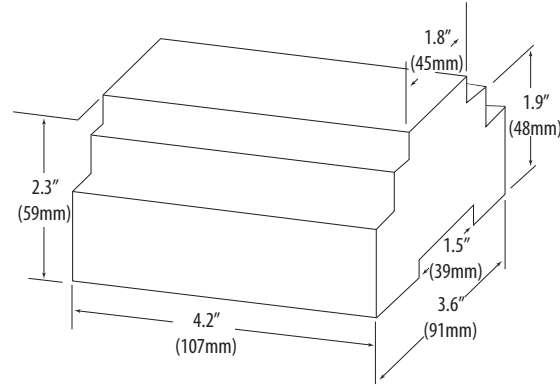

*Bottom View (DIN Mount Option)*

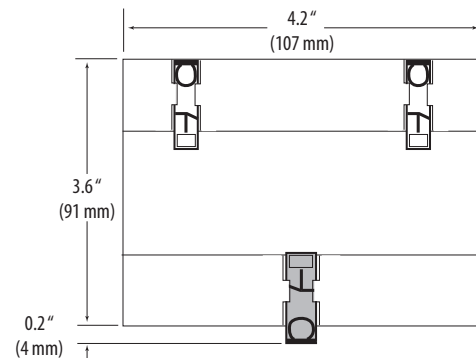

*Bottom View (Screw Mount Option)*

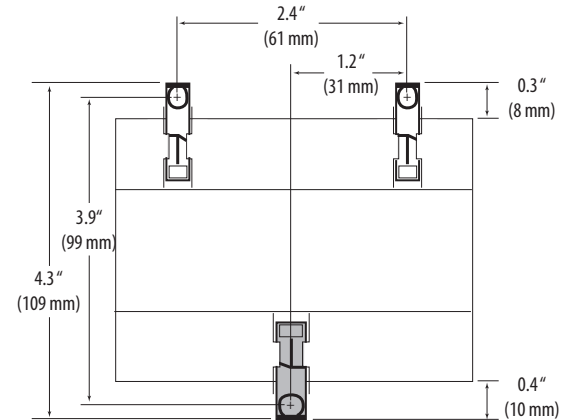


## Data Outputs

### ***Full Data Set (FDS):***


Power (kW)  
Energy (kWh)  
Configurable for CT & PT ratios, system type, and passwords  
Diagnostic alerts  
Current: 3-phase average  
Volts: 3-phase average  
Current: by phase  
Volts: by phase Line-Line and Line-Neutral  
Power: Real, Reactive, and Apparent 3-phase total and per phase  
Power Factor: 3-phase average and per phase  
Frequency  
Power Demand: Most Recent and Peak  
Demand Configuration: Fixed, Rolling Block, and External Sync

## Product Diagram

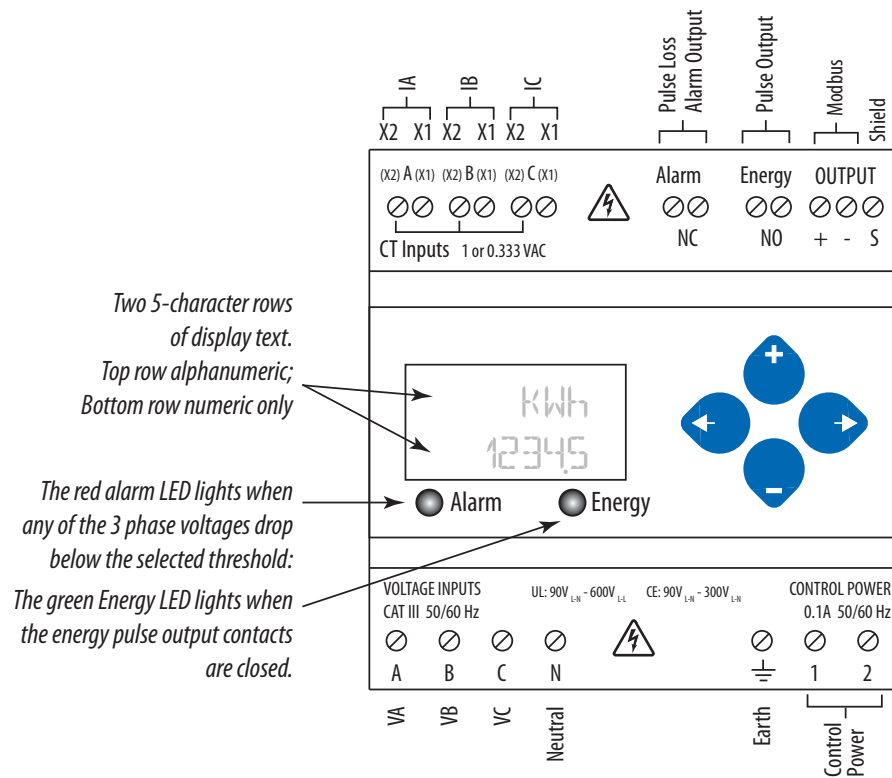


## Display Screen Diagram

### LCD Screen:

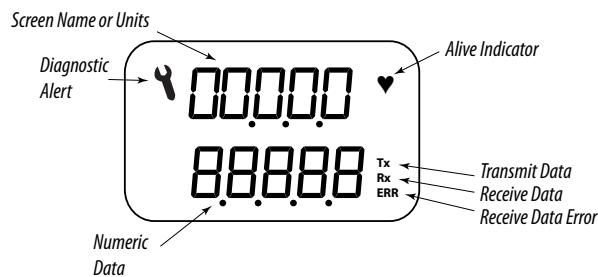

### Buttons:

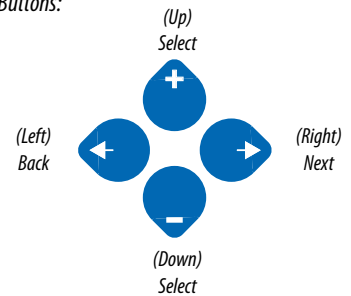

## Installation


-  **WARNING: TO AVOID FIRE, SHOCK, OR DEATH, disconnect power prior to installation.**
-  **Reinstall any covers that are displaced during the installation before powering the unit.**
-  **Mount the meter in an appropriate electrical enclosure near equipment to be monitored.**

**Do not install on the load side of a Variable Frequency Drive (VFD), aka Variable Speed Drive (VSD) or Adjustable Frequency Drive (AFD).**

The meter can be mounted in two ways: on standard 35 mm DIN rail or screw-mounted to the interior surface of the enclosure.

### A. DIN Rail Mounting


1. Attach the mounting clips to the underside of the housing by sliding them into the slots from the inside. The stopping pegs must face the housing, and the outside edge of the clip must be flush with the outside edge of the housing.
2. Snap the clips onto the DIN rail. See the diagram of the underside of the housing (below).

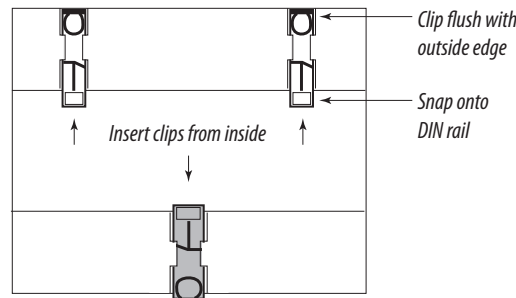

3. To reduce horizontal shifting across the DIN rail, use two end stop clips.

### B. Screw Mounting

1. Attach the mounting clips to the underside of the housing by sliding them into the slots from the outside. The stopping pegs must face the housing, and the screw hole must be exposed on the outside of the housing.
2. Use three #8 screws (not supplied) to mount the meter to the inside of the enclosure. See the diagram of the underside of the housing (below).

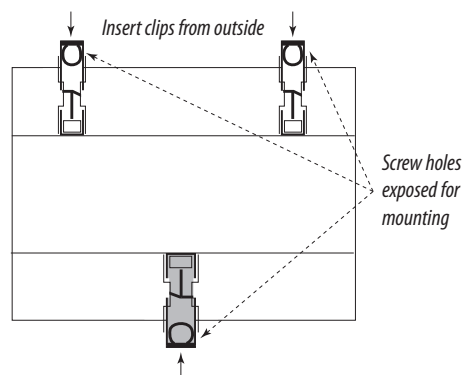

## Supported System Types

The meter has a number of different possible system wiring configurations (see Wiring section). To configure the meter, set the System Type via the User Interface or Modbus register 130. The System Type tells the meter which of its current and voltage inputs are valid, which are to be ignored, and if neutral is connected. Setting the correct System Type prevents unwanted energy accumulation on unused inputs, selects the formula to calculate the Theoretical Maximum System Power, and determines which phase loss algorithm is to be used. The phase loss algorithm is configured as a percent of the Line-to-Line System Voltage (except when in System Type 10) and also calculates the expected Line to Neutral voltages for system types that have Neutral (12 & 40).

Values that are not valid in a particular System Type display as “----” on the User Interface or as QNAN in the Modbus registers.

|                     |     | CTs     |     | Voltage Connections |              | System Type         |                             | Phase Loss Measurements |            |                     | Wiring Diagram |
|---------------------|-----|---------|-----|---------------------|--------------|---------------------|-----------------------------|-------------------------|------------|---------------------|----------------|
| Number of wires     | Qty | ID      | Qty | ID                  | Type         | Modbus Register 130 | User Interface: SETUP>S SYS | VLL                     | VLN        | Balance             | Diagram number |
| Single-Phase Wiring |     |         |     |                     |              |                     |                             |                         |            |                     |                |
| 2                   | 1   | A       | 2   | A, N                | L-N          | 10                  | 1L + 1n                     |                         | AN         |                     | 1              |
| 2                   | 1   | A       | 2   | A, B                | L-L          | 11                  | 2L                          | AB                      |            |                     | 2              |
| 3                   | 2   | A, B    | 3   | A, B, N             | L-L with N   | 12                  | 2L + 1n                     | AB                      | AN, BN     | AN-BN               | 3              |
| Three-Phase Wiring  |     |         |     |                     |              |                     |                             |                         |            |                     |                |
| 3                   | 3   | A, B, C | 3   | A, B, C             | Delta        | 31                  | 3L                          | AB, BC, CA              |            | AB-BC-CA            | 4              |
| 4                   | 3   | A, B, C | 4   | A, B, C, N          | Grounded Wye | 40                  | 3L + 1n                     | AB, BC, CA              | AN, BN, CN | AN-BN-CN & AB-BC-CA | 5, 6           |

## Wiring Symbols

To avoid distortion, use parallel wires for control power and voltage inputs.

The following symbols are used in the wiring diagrams on the following pages.


| Symbol | Description                                                                                                                                                                                       |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | Voltage Disconnect Switch                                                                                                                                                                         |
|        | Fuse (installer is responsible for ensuring compliance with local requirements. No fuses are included with the meter.)                                                                            |
|        | Earth ground                                                                                                                                                                                      |
|        | Current Transducer                                                                                                                                                                                |
|        | Potential Transformer                                                                                                                                                                             |
|        | Protection containing a voltage disconnect switch with a fuse or disconnect circuit breaker. The protection device must be rated for the available short-circuit current at the connection point. |

### CAUTION

#### RISK OF EQUIPMENT DAMAGE

- This product is designed only for use with 1V or 0.33V current transducers (CTs).
- DO NOT USE CURRENT OUTPUT (e.g. 5A) CTs ON THIS PRODUCT.
- Failure to follow these instructions can result in overheating and permanent equipment damage.


**⚠ WARNING ⚡**

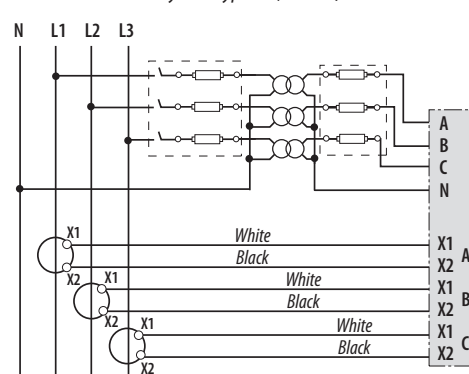




## Control Power

### Direct Connect Control Power (Line to Line)

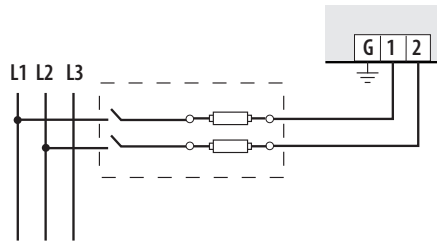


*Line to Line from 90 VAC to 600 VAC (UL). In UL installations the lines may be floating (such as a delta). If any lines are tied to an earth (such as a corner grounded delta), see the Line to Neutral installation limits. In CE compliant installations, the lines must be neutral (earth) referenced at less than 300 VAC<sub>L-N</sub>*

### Direct Connect Control Power (Line to Neutral)

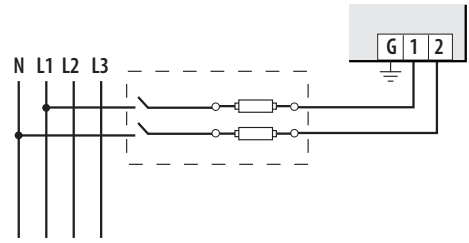


*Line to Neutral from 90 VAC to 347 VAC (UL) or 300 VAC (CE)*

### Direct Connect Control Power (DC Control Power)

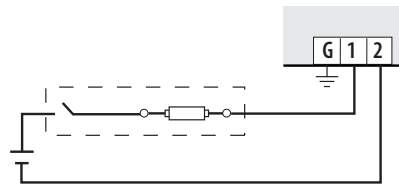

*DC Control Power from 125 VDC to 300 VDC  
(UL and CE max.)*

### Control Power Transformer (CPT) Connection

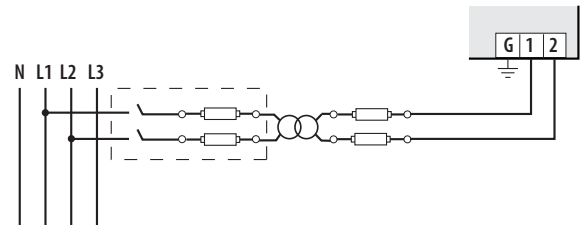

*The Control Power Transformer may be wired L-N or L-L. Output to meet meter input requirements*

## **Fuse Recommendations**

Keep the fuses close to the power source (obey local and national code requirements).

For selecting fuses and circuit breakers, use the following criteria:

- Select current interrupt capacity based on the installation category and fault current capability.
- Select over-current protection with a time delay.
- Select a voltage rating sufficient for the input voltage applied.
- Provide overcurrent protection and disconnecting means to protect the wiring. For DC installations, provide external circuit protection. Suggested: 0.5 A, time delay fuses.
- The earth connection (G) is required for electromagnetic compatibility (EMC) and is not a protective earth ground.

## Quick Setup Instructions


These instructions assume the meter is set to factory defaults. If it has been previously configured, all optional values should be checked.

1. Press the  or  button repeatedly until **SETUP** screen appears.
2.  to the **PASWD** screen.
3.  through the digits. Use the  or  buttons to select the password (the default is 00000). Exit the screen to the right.
4. Use the  or  buttons to select the parameter to configure.
5. The first Setup screen is **S COM** (set communications).
  - a.  to the **ADDR** screen and through the address digits. Use the  or  buttons to select the Modbus address.
  - b.  to the **BAUD** screen. Use the  or  buttons to select the baud rate.
  - c.  to the **PAR** screen. Use the  or  buttons to select the parity.
  - d.  back to the **S COM** screen.
6.  to the **S CT** (Set Current Transducer) screen.
  - a.  to the **CT V** screen. Use the  or  buttons to select the voltage mode Current Transducer output voltage.
  - b.  to the **CT SZ** screen and through the digits. Use the  or  buttons to select the CT size in amps.
  - c.  back to the **S CT** screen.
7.  to the **S SYS** (Set System) screen.
  - a.  to the **SYSTEM** screen. Use the  or  buttons to select the System Type (see wiring diagrams).
  - b.  back to the **S SYS** screen.
8. (Optional)  to the **S PT** (Set Potential Transformer) screen. If PTs are not used, then skip this step.
  - a.  to the **PTRATIO** screen and through the digits. Use the  or  buttons to select the Potential Transformer step down ratio.
  - b.  back to the **S PT** screen.
9.  to the **S V** (Set System Voltage) screen.
  - a.  to the **VLL** (or **VLN** if system is 1L-1n) screen and through the digits. Use the  or  buttons to select the Line to Line System Voltage.
  - b.  back to the **S V** screen.
10. Use the  to exit the setup screen and then **SETUP**.
11. Check that the wrench is not displayed on the LCD.
  - a. If the wrench is displayed, use the  or  buttons to find the **ALERT** screen.
  - b.  through the screens to see which alert is on.

For full setup instructions, see the configuration instructions on the following pages.

Solid State Output

The Series 4000-K meters have one normally open (N.O.) KY Form A output and one normally closed (N.C.) output.\* One is dedicated to energy (Wh), and the other to Alarm. See the Setup section for configuration information.

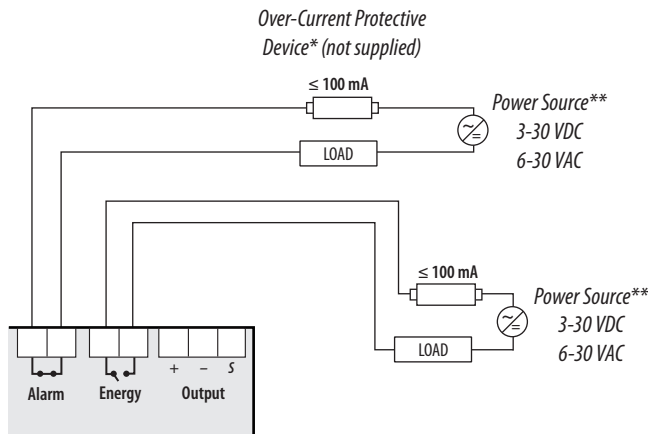

The solid state pulse outputs are rated for 30 VAC/DC nom.  
Maximum load current is 100 mA at 25°C. Derate 0.56mA per °C above 25°C (e.g. 86 mA@50°C).  
\* The over-current protective device must be rated for the short circuit current at the connection point.  
\*\* All pulse outputs and communication circuits are only intended to be connected to non-hazardous circuits (SELV or Class 2). Do not connect to hazardous voltages.


User Interface (UI)  
Menu Abbreviations  
Defined

The user can set the display mode to either IEC or IEEE notation in the SETUP menu.


| Main Menu     |               |                             |
|---------------|---------------|-----------------------------|
| IEC           | IEEE          | Description                 |
| D             | D             | Demand                      |
| MAX           | M             | Maximum Demand              |
| P             | W             | Present Real Power          |
| Q             | VAR           | Present Reactive Power      |
| S             | VA            | Present Apparent Power      |
| A             | A             | Amps                        |
| UAB, UBC, UAC | VAB, VBC, VAC | Voltage Line to Line        |
| V             | VLN           | Voltage Line to Neutral     |
| PF            | PF            | Power Factor                |
| U             | VLL           | Voltage Line to Line        |
| HZ            | HZ            | Frequency                   |
| KSh           | KVAh          | Accumulated Apparent Energy |
| KQh           | KVARh         | Accumulated Reactive Energy |
| KPh           | KWh           | Accumulated Real Energy     |
| PLOSS         | PLOSS         | Phase Loss                  |
| LOWPF         | LOWPF         | Low Power Factor Error      |

| Main Menu |        |                                                |
|-----------|--------|------------------------------------------------|
| IEC       | IEEE   | Description                                    |
| F ERR     | F ERR  | Frequency Error                                |
| I OVR     | I OVR  | Over Current                                   |
| V OVR     | V OVR  | Over Voltage                                   |
| PULSE     | PULSE  | kWh Pulse Output Overrun (configuration error) |
| _PHASE    | _PHASE | Summary Data for 1, 2, or 3 active phases      |
| ALERT     | ALERT  | Diagnostic Alert Status                        |
| INFO      | INFO   | Unit Information                               |
| MODEL     | MODEL  | Model Number                                   |
| OS        | OS     | Operating System                               |
| RS        | RS     | Reset System                                   |
| SN        | SN     | Serial Number                                  |
| RESET     | RESET  | Reset Data                                     |
| PASWD     | PASWD  | Enter Reset or Setup Password                  |
| ENERG     | ENERG  | Reset Energy Accumulators                      |
| DEMND     | DEMND  | Reset Demand Maximums                          |


## User Interface for Data Configuration

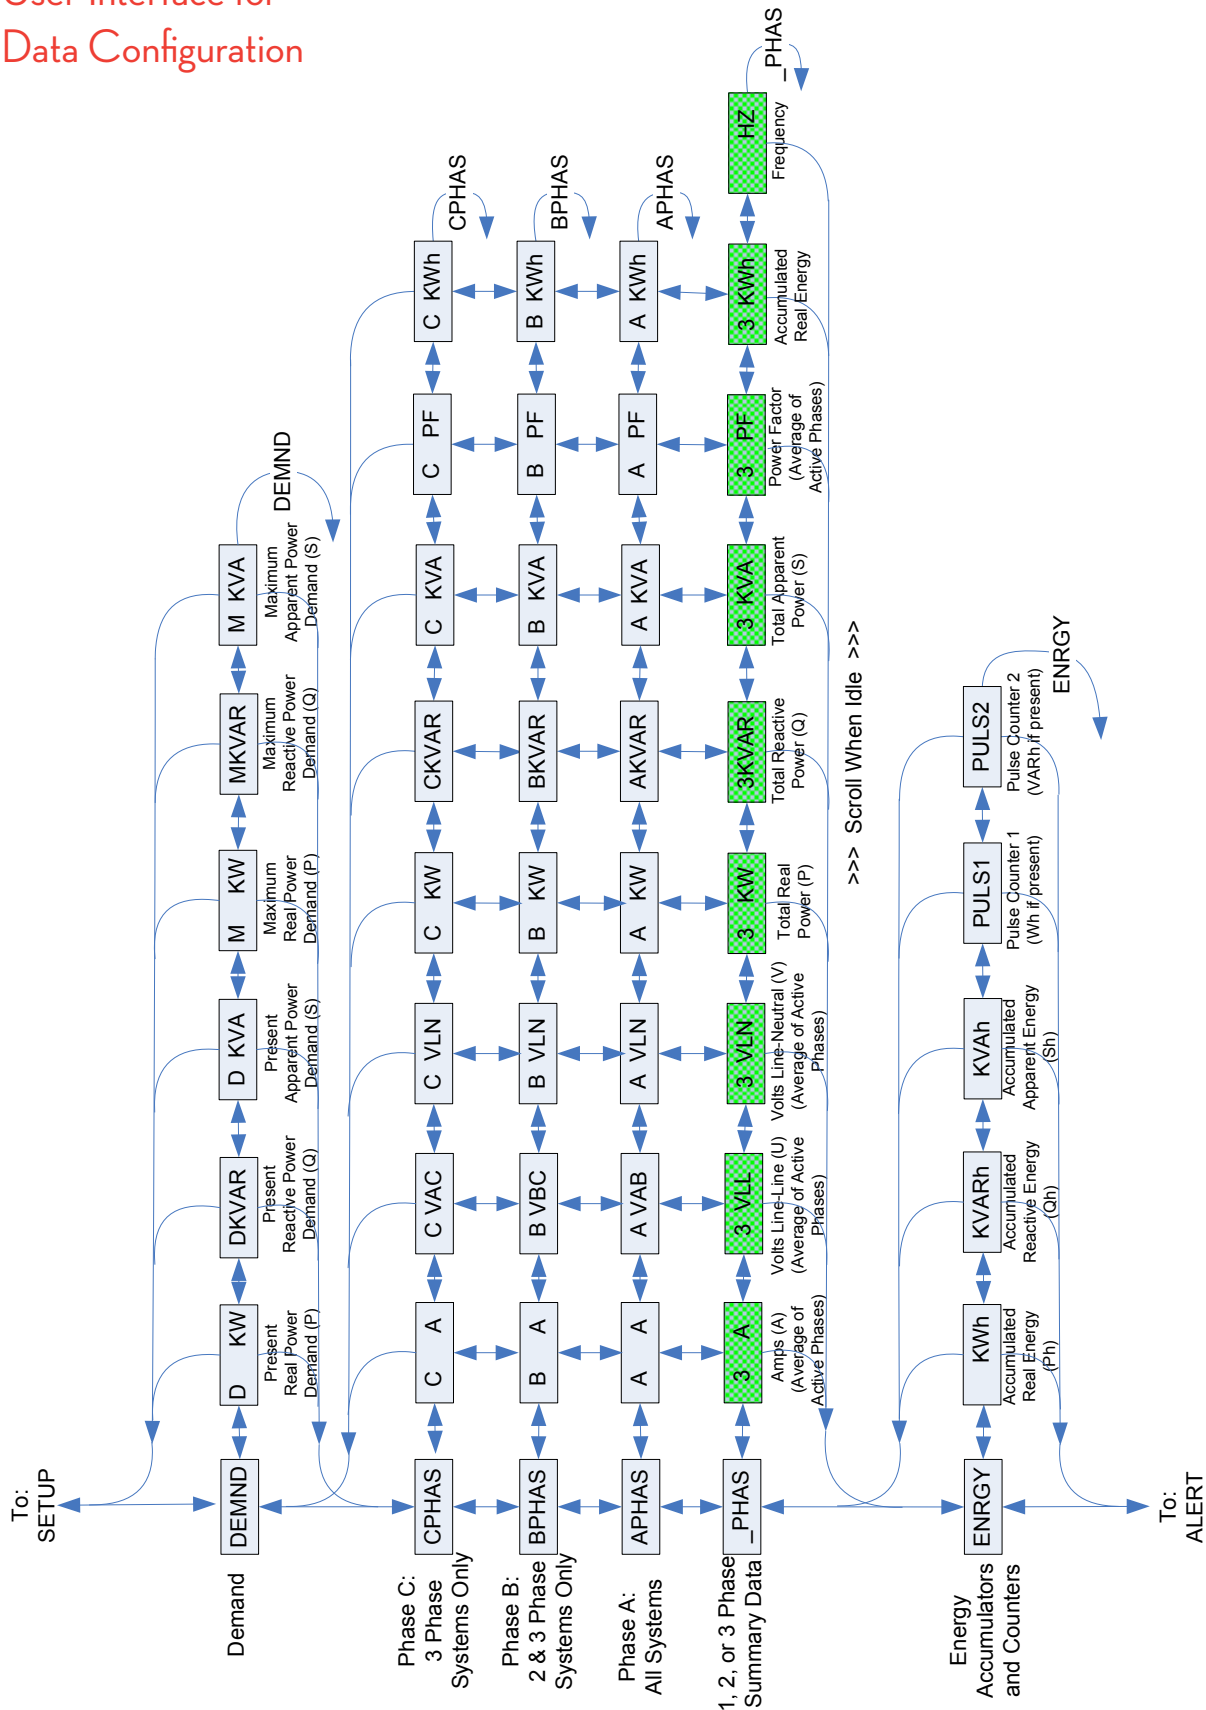

## Alert/Reset Information

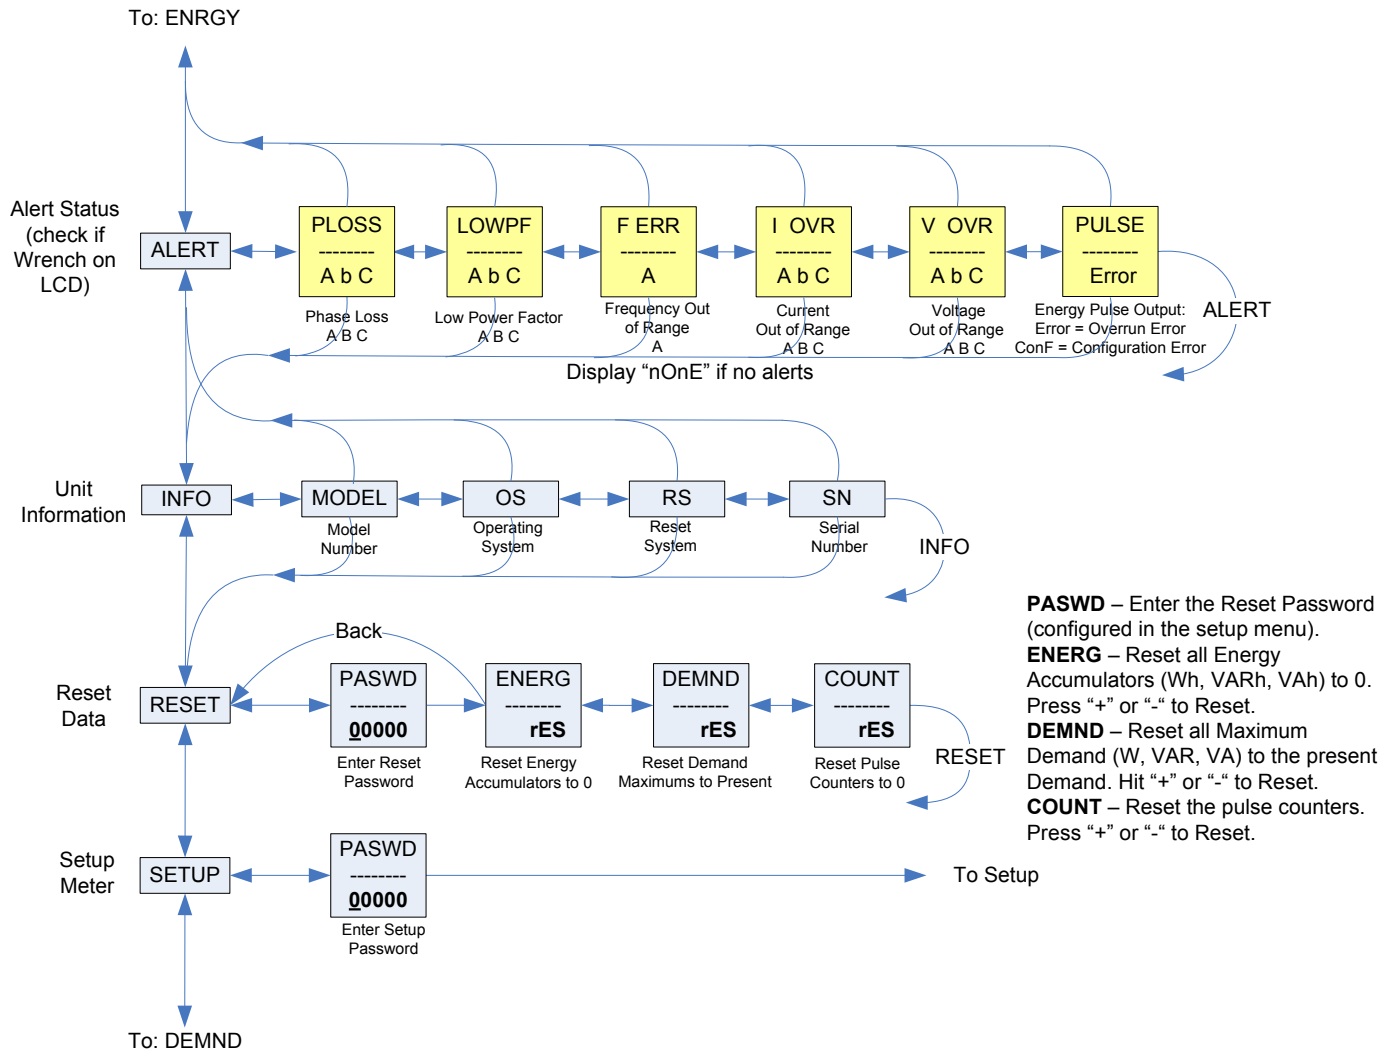


## UI for Setup

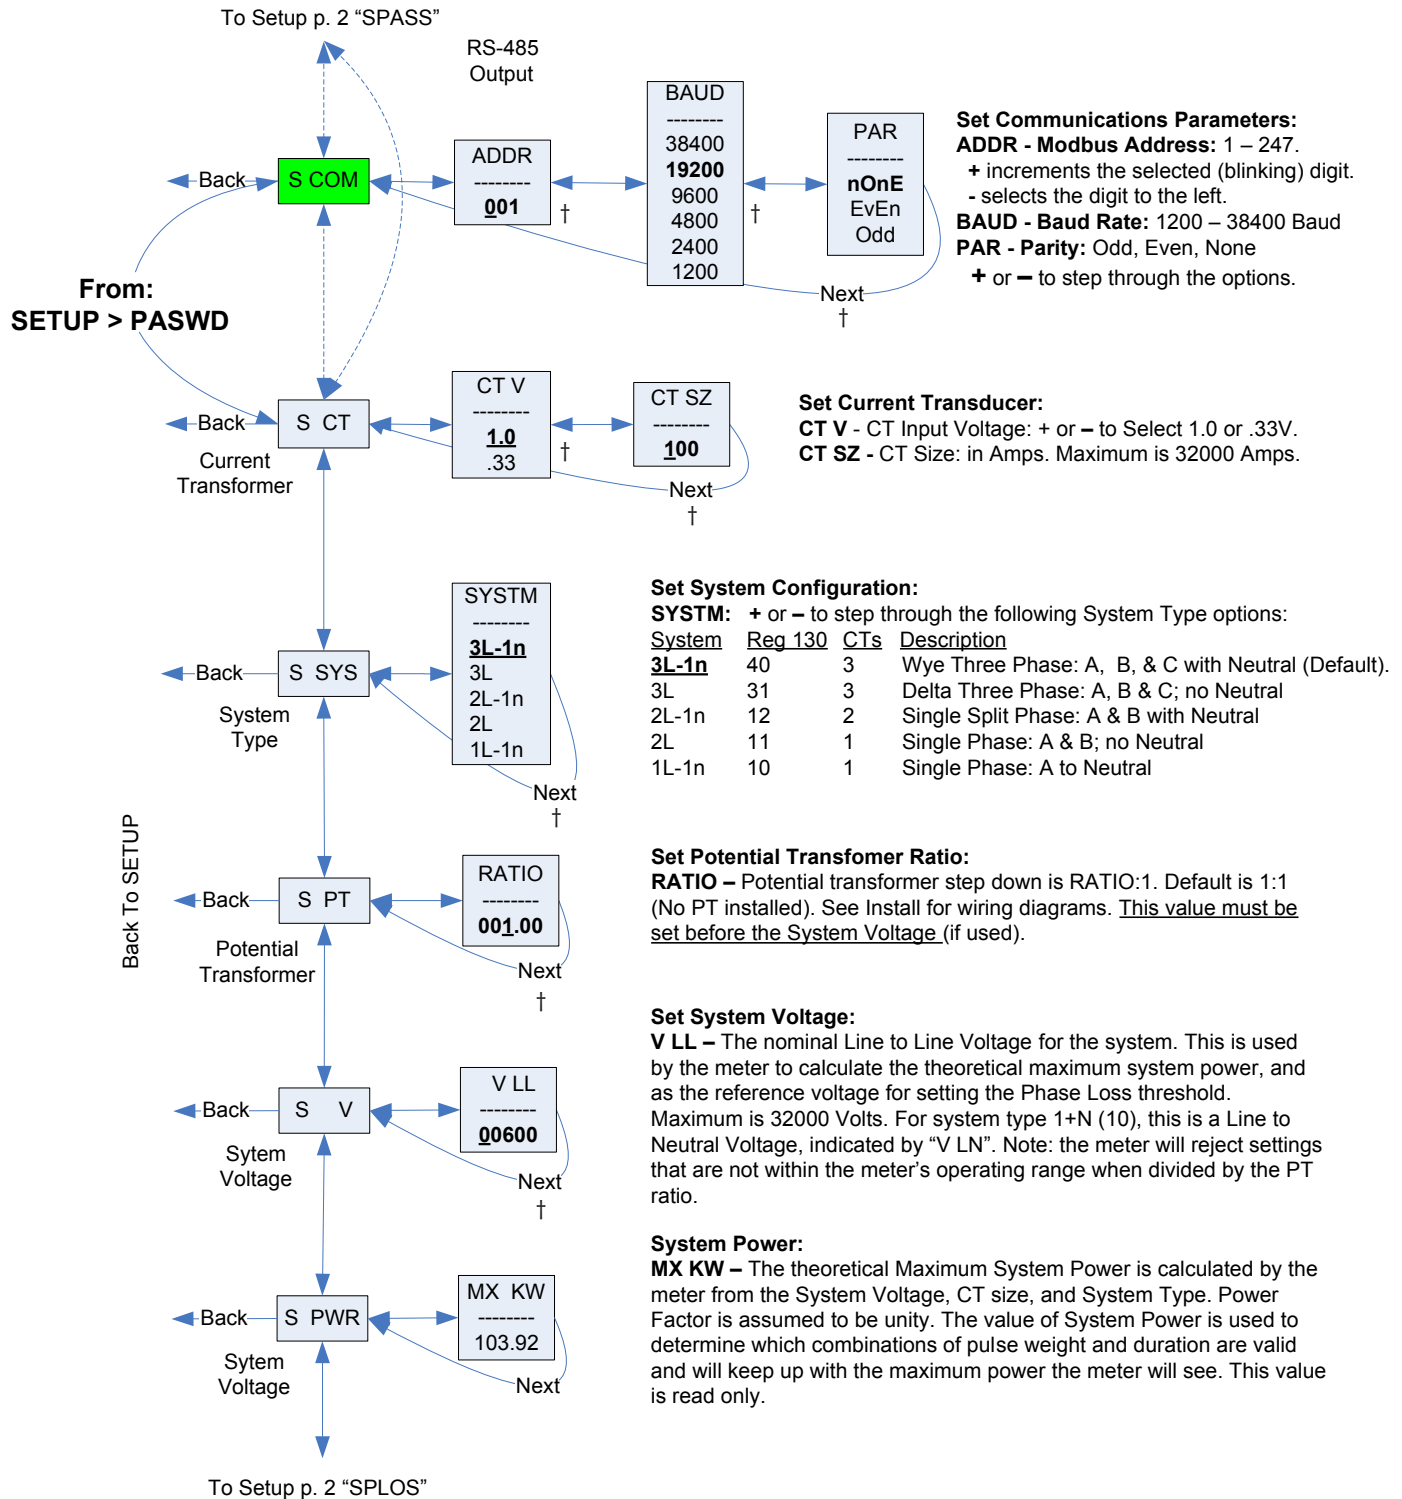

† When leaving this parameter screen using the right button (➡), the display will briefly indicate "SAvEd" to confirm that any changes made have been accepted.

## UI for Setup (cont.)

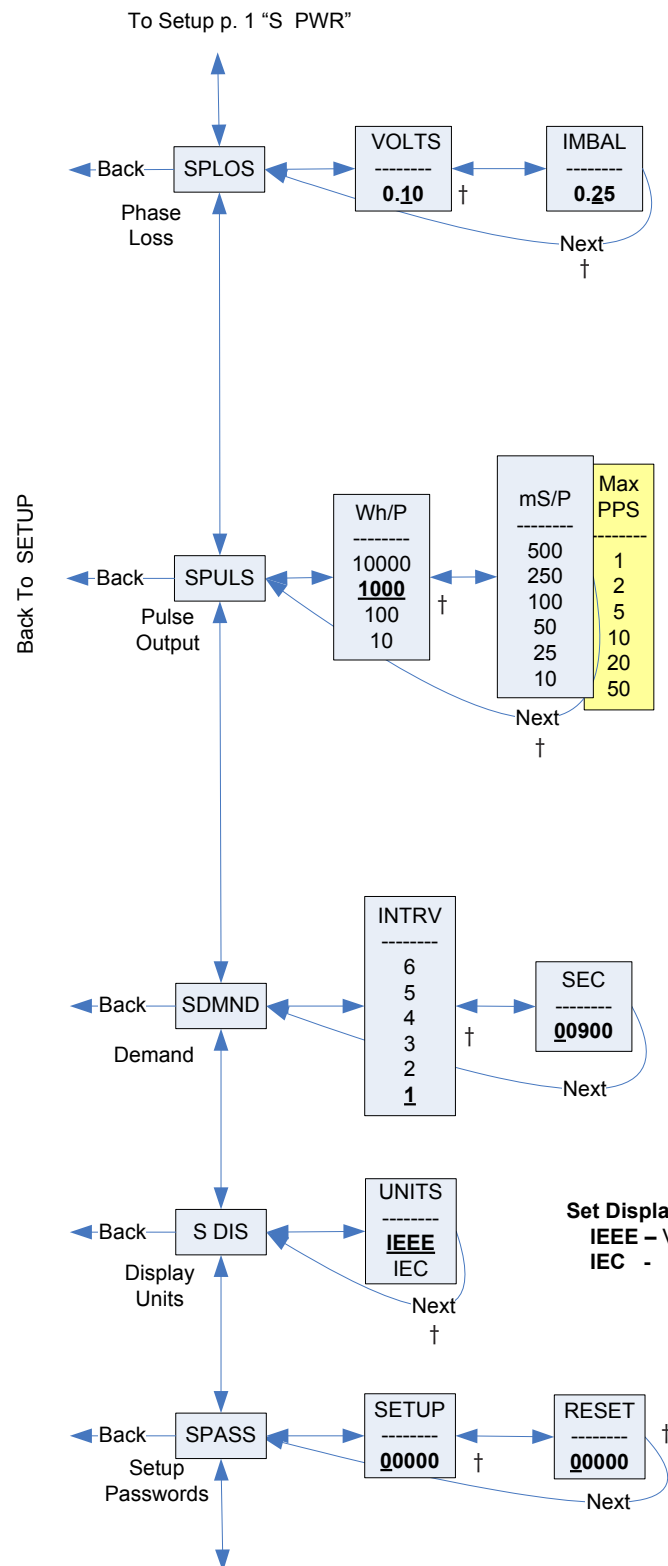

### Set Phase Loss:

**VOLTS - Phase Loss Voltage:** The fraction of the system voltage below which Phase Loss Alarm is on. For system types with neutral, the Line to Neutral voltage is also calculated and tested. If the System Voltage is 600 and the fraction is set to 0.10, then the Phase Loss threshold will be 60 volts.

**IMBAL - Phase Loss Imbalance:** The fractional difference in Line to Line voltages above which Phase Loss Alarm is on. For system types with neutral, the Line to Neutral voltages are also tested. For system types 1+N (10) and 2 (11), imbalance is not tested.

### Set Pulse:

The System Type, CT size, PT Ratio, and System Voltage must all be configured before setting the Pulse Energy. If any of these parameters are changed, the meter will hunt for a new Pulse Duration, but will not change the Pulse Energy. If it cannot find a solution, the meter will display the wrench, show "ConF" in the ALARM -> PULSE screen, and enable Energy pulse output configuration error bit in the Modbus Diagnostic Alert Bitmap (if equipped).

**Wh/P - Set Pulse Energy:** In Watt Hours (& VAR Hours, if present) per Pulse. When moving down to a smaller energy, the meter will not allow the selection if it cannot find a pulse duration that will allow the pulse output to keep up with Theoretical Maximum System Power (see S\_PWR screen). When moving up to a larger energy, the meter will jump to the first value where it can find a valid solution.

**mS/P - Minimum Pulse Duration Time:** This read only value is set by the meter to the slowest duration (in mS per closure) that will keep up with the Theoretical Maximum System Power. The open time is greater than or equal to the closure time. The maximum Pulses Per Second (PPS) is shown in yellow.

### Set Demand Interval:

**INTRV** - The number of Sub-Intervals (1 to 6) in a Demand Interval. Default is 1 (block demand).

**SEC** - Sub-Interval length in seconds. Default is 900 (15 minutes). Set to 0 for external sync-to-comms (Modbus units only).

### Set Display Units: +/- to switch between:

**IEEE** - VLL VLN W VAR VA Units.

**IEC** - U V P Q S Units.

### Set Passwords:

**SETUP** - The Password to enter the SETUP menu.


**RESET** - The Password to enter the RESET menu.

† When leaving this parameter screen using the right button (➡), the display will briefly indicate "SAvEd" to confirm that any changes made have been accepted.

## RS-485 Communications

### Daisy-chaining Devices to the Power Meter

The RS-485 slave port allows the power meter to be connected in a daisy chain with up to 63 2-wire devices.

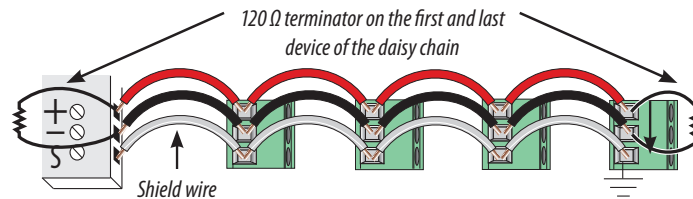


### Notes

- The terminal's voltage and current ratings are compliant with the requirements of the EIA RS-485 communications standard.
- The RS-485 transceivers are ¼ unit load or less.
- RS-485+ has a 47 kΩ pull up to +5V, and RS-485- has a 47 kΩ pull down to Shield (RS-485 signal ground).
- Wire the RS-485 bus as a daisy chain from device to device, without any stubs. Use 120 Ω termination resistors at each end of the bus (not included).
- Shield is not internally connected to Earth Ground.
- Connect Shield to Earth Ground somewhere on the RS-485 bus.

### For all terminals:

- When tightening terminals, apply the correct torque: 0.37 to 0.44 ft-lb (0.5-0.6 N-m).
- Use 14-24 gauge (2.1-0.2 mm<sup>2</sup>) wire.

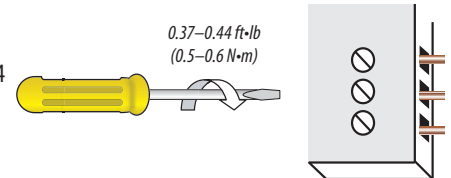



## Standard Modbus Default Settings

| Setting                                                            | Value                                                     | Modbus Register |
|--------------------------------------------------------------------|-----------------------------------------------------------|-----------------|
| Setup Password                                                     | 00000                                                     | —               |
| Reset Password                                                     | 00000                                                     | —               |
| System Type                                                        | 40 (3 + N) Wye                                            | 130             |
| CT Primary Ratio (if CTs are not included)                         | 100A                                                      | 131             |
| CT Secondary Ratio                                                 | 1V                                                        | 132             |
| PT Ratio                                                           | 1:1 (none)                                                | 133             |
| System Voltage                                                     | 600 V L-L                                                 | 134             |
| Max. Theoretical Power<br>(Analog Output: full scale (20mA or 5V)) | 104 kW                                                    | 135             |
| Display Mode                                                       | 1 (IEEE)                                                  | 137             |
| Phase Loss                                                         | 10% of System Voltage (60V), 25% Phase to Phase Imbalance | 142, 143        |
| Pulse Energy                                                       | 1 (kWh/pulse)                                             | 144             |
| Demand: number of sub-intervals per interval                       | 1 (block mode)                                            | 149             |
| Demand: sub-interval length                                        | 900 sec (15 min)                                          | 150             |
| Modbus Address                                                     | 001                                                       | —               |
| Modbus Baud Rate                                                   | 19200 baud                                                | —               |
| Modbus Parity                                                      | None                                                      | —               |
| Log Read Page                                                      | 0                                                         | 158             |
| Logging Configuration Register                                     | 0                                                         | 159             |
| Log Register Pointer 1                                             | 1 (Real Energy MSR)                                       | 169             |
| Log Register Pointer 2                                             | 2 (Real Energy LSR)                                       | 170             |
| Log Register Pointer 3                                             | 29 (Reactive Energy MSR)                                  | 171             |
| Log Register Pointer 4                                             | 30 (Reactive Energy LSR)                                  | 172             |
| Log Register Pointer 5                                             | 37 (Real Demand)                                          | 173             |
| Log Register Pointer 6                                             | 38 (Reactive Demand)                                      | 174             |
| Log Register Pointer 7                                             | 39 (Apparent Demand)                                      | 175             |
| Log Register Pointer 8                                             | 155 (Month/Day)                                           | 176             |
| Log Register Pointer 9                                             | 156 (Year/Hour)                                           | 177             |
| Log Register Pointer 10                                            | 157 (Minutes/Seconds)                                     | 178             |

## Modbus Point Map Overview

The Series 4000-K full data set (FDS) features data outputs such as demand calculations, per phase VA and VAR, and VAh VARh accumulators. For security reasons, configuration and resets on all Series 4000 meters are protected by a user configurable passcode. The meter supports variable CTs and PTs, allowing a much wider range of operation from 90V x 5A up to 32000V x 32000A. To promote this, the meter permits variable scaling of the 16-bit integer registers via the scale registers. The 32-bit floating point registers do not need to be scaled.

Integer registers begin at 001 (0x001). Floats at 257 (0x101). Configuration registers at 129 (0x081). Values not supported in a particular System Type configuration will report QNAN (0x8000 in Integer Registers, 0x7FC00000 in Floating Point Registers).

### Supported Modbus Commands

*Note: ID String information varies from model to model. Text shown here is an example.*

| Command | Description                                                                                                                                                                                                                                                                                                                                         |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x03    | Read Holding Registers                                                                                                                                                                                                                                                                                                                              |
| 0x04    | Read Input Registers                                                                                                                                                                                                                                                                                                                                |
| 0x06    | Preset Single Register                                                                                                                                                                                                                                                                                                                              |
| 0x10    | Preset Multiple Registers                                                                                                                                                                                                                                                                                                                           |
| 0x11    | Report ID                                                                                                                                                                                                                                                                                                                                           |
|         | Return string:<br>byte0: address<br>byte1: 0x11<br>byte2: #bytes following w/out crc<br>byte3: ID byte = 247<br>byte4: status = 0xFF if the operating system is used; status = 0x00 if the reset system is used<br>bytes5+: ID string = "Leviton Series 4000K Power Meter Full Data Set" - RESET SYSTEM RUNNING RS Version x.xxx" last 2 bytes: CRC |
| 0x2B    | Read Device Identification, BASIC implementation (0x00, 0x01 and 0x02 data), Conformity Level 1.                                                                                                                                                                                                                                                    |
|         | Object values:<br>0x01: "Leviton"<br>0x02: "Series 4000"<br>0x03: "Vxx.yyy", where xx.yyy is the OS version number (reformatted version of the Modbus register #7001, (Firmware Version, Operating System).<br>If register #7001 == 12345, then the 0x03 data would be "V12.345").                                                                  |

### Legend

The following table lists the addresses assigned to each data point. For floating point format variables, each data point appears twice because two 16-bit addresses are required to hold a 32-bit float value.

|              |                                                                                                                                                                                        |                                                                                                                                                                |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| R/W          | R=read only; R/W=read from either int or float formats, write only to integer format.                                                                                                  |                                                                                                                                                                |
| NV           | Value is stored in non-volatile memory. The value will still be available if the meter experiences a power loss and reset.                                                             |                                                                                                                                                                |
| Format       | UInt                                                                                                                                                                                   | Unsigned 16-bit integer.                                                                                                                                       |
|              | SInt                                                                                                                                                                                   | Signed 16-bit integer.                                                                                                                                         |
|              | ULong                                                                                                                                                                                  | Unsigned 32-bit integer; Upper 16-bits (MSR) in lowest-numbered / first listed register (001/002 = MSR/LSR).                                                   |
|              | Float                                                                                                                                                                                  | 32-bit floating point; Upper 16-bits (MSR) in lowest-numbered / first listed register (257/258 = MSR/LSR). Encoding is per IEEE standard 754 single precision. |
| Units        | Lists the physical units that a register holds.                                                                                                                                        |                                                                                                                                                                |
| Scale Factor | Some Integer values must be multiplied by a constant scale factor (typically a fraction), to be read correctly. This is done to allow integer numbers to represent fractional numbers. |                                                                                                                                                                |
| Range        | Defines the limit of the values that a register can contain.                                                                                                                           |                                                                                                                                                                |

## Modbus Point Map

| S4000-K Register | R/W | NV | Format | Units | Scale  | Range     | Description                                        |
|------------------|-----|----|--------|-------|--------|-----------|----------------------------------------------------|
| 001              | R   | NV | ULong  | kWh   | E      | 0-0xFFFF  | Real Energy Consumption (MSR)                      |
| 002              |     |    |        |       |        | 0-0xFFFF  | Real Energy Consumption (LSR)                      |
| 003              | R   |    | UInt   | kW    | W      | 0-32767   | Total Instantaneous Real Power (3 Phase Total)     |
| 004              | R   |    | UInt   | kVAR  | W      | 0-32767   | Total Instantaneous Reactive Power (3 Phase Total) |
| 005              | R   |    | UInt   | kVA   | W      | 0-32767   | Total Instantaneous Apparent Power (3 Phase Total) |
| 006              | R   |    | UInt   | Ratio | 0.0001 | 0-10000   | Total Power Factor (Total KW / Total KVA)          |
| 007              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, L-L, Average of 3 Phases                  |
| 008              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, L-N, Average of 3 Phases                  |
| 009              | R   |    | UInt   | Amp   | I      | 0-32767   | Current, Average of 3 Phases                       |
| 010              | R   |    | UInt   | kW    | W      | 0-32767   | Real Power, Phase A                                |
| 011              | R   |    | UInt   | kW    | W      | 0-32767   | Real Power, Phase B                                |
| 012              | R   |    | UInt   | kW    | W      | 0-32767   | Real Power, Phase C                                |
| 013              | R   |    | UInt   | Ratio | 0.0001 | 0-10000   | Power Factor, Phase A                              |
| 014              | R   |    | UInt   | Ratio | 0.0001 | 0-10000   | Power Factor, Phase B                              |
| 015              | R   |    | UInt   | Ratio | 0.0001 | 0-10000   | Power Factor, Phase C                              |
| 016              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, Phase A-B                                 |
| 017              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, Phase B-C                                 |
| 018              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, Phase A-C                                 |
| 019              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, Phase A-N                                 |
| 020              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, Phase B-N                                 |
| 021              | R   |    | UInt   | Volt  | V      | 0-32767   | Voltage, Phase C-N                                 |
| 022              | R   |    | UInt   | Amp   | I      | 0-32767   | Current, Instantaneous, Phase A                    |
| 023              | R   |    | UInt   | Amp   | I      | 0-32767   | Current, Instantaneous, Phase B                    |
| 024              | R   |    | UInt   | Amp   | I      | 0-32767   | Current, Instantaneous, Phase C                    |
| 025              | R   |    | UInt   |       |        |           | Reserved; returns 0x8000 (QNaN)                    |
| 026              | R   |    | UInt   | Hz    | 0.01   | 4500-6500 | Frequency (derived from Phase A)                   |
| 027              | R   | NV | ULong  | KVAh  | E      | 0-0xFFFF  | Apparent Energy Consumption (MSR)                  |
| 028              |     |    |        |       |        | 0-0xFFFF  | Apparent Energy Consumption (LSR)                  |
| 029              | R   | NV | ULong  | KVARh | E      | 0-0xFFFF  | Reactive Energy Consumption (MSR)                  |
| 030              |     |    |        |       |        | 0-0xFFFF  | Reactive Energy Consumption (LSR)                  |
| 031              | R   |    | UInt   | kVA   | W      | 0-32767   | Apparent Power, Phase A                            |
| 032              | R   |    | UInt   | kVA   | W      | 0-32767   | Apparent Power, Phase B                            |
| 033              | R   |    | UInt   | kVA   | W      | 0-32767   | Apparent Power, Phase C                            |
| 034              | R   |    | UInt   | kVAR  | W      | 0-32767   | Reactive Power, Phase A                            |
| 035              | R   |    | UInt   | kVAR  | W      | 0-32767   | Reactive Power, Phase B                            |
| 036              | R   |    | UInt   | kVAR  | W      | 0-32767   | Reactive Power, Phase C                            |
| 037              | R   |    | UInt   | kW    | W      | 0-32767   | Total Real Power Present Demand                    |
| 038              | R   |    | UInt   | kVAR  | W      | 0-32767   | Total Reactive Power Present Demand                |
| 039              | R   |    | UInt   | kVA   | W      | 0-32767   | Total Apparent Power Present Demand                |
| 040              | R   | NV | UInt   | kW    | W      | 0-32767   | Total Real Power Max Demand                        |
| 041              | R   | NV | UInt   | kVAR  | W      | 0-32767   | Total Reactive Power Max Demand                    |
| 042              | R   | NV | UInt   | kVA   | W      | 0-32767   | Total Apparent Power Max Demand                    |

## Modbus Point Map (cont.)

| S4000-K Register | R/W | NV | Format | Units | Scale | Range              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------|-----|----|--------|-------|-------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 043*             | R   | NV | ULong  |       |       | 0-0xFFFF           | Pulse Counter 1 (Real Energy)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 044*             |     |    |        |       |       |                    | MSR<br>LSR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 045*             | R   | NV | ULong  |       |       | 0-0xFFFF           | Pulse Counter 2 (Reactive Energy)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 046*             |     |    |        |       |       |                    | MSR<br>LSR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 047*             | R   | NV | ULong  | kWh   | E     | 0-0xFFFF           | Real Energy Consumption Phase A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 048*             |     |    |        |       |       |                    | MSR<br>LSR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 049*             | R   | NV | ULong  | kWh   | E     | 0-0xFFFF           | Real Energy Consumption Phase B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 050*             |     |    |        |       |       |                    | MSR<br>LSR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 051*             | R   | NV | ULong  | kWh   | E     | 0-0xFFFF           | Real Energy Consumption Phase C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 052*             |     |    |        |       |       |                    | MSR<br>LSR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 129              | R/W |    | UInt   |       |       | N/A                | Command Register:<br>- Write 30078 (0x757E) to clear all Energy Accumulators to 0.<br>- Write 21211 (0x52DB) to begin new Demand Sub-Interval calculation cycle. Takes effect at the end of the next 1 second calculation cycle. Write no more frequently than every 10 seconds.<br>- Write 21212 (0x52DC) to reset Max Demand values to Present Demand Values. Takes effect at the end of the next 1 second calculation cycle. Write no more frequently than every 10 seconds.<br>- Write 16498 (0x4072) to Clear Pulse Counters to 0.<br>- Read always returns 0. |
| 130              | R/W | NV | UInt   |       |       | 10, 11, 12, 31, 40 | Single Phase: A + N<br>Single Phase: A + B<br>Single Split Phase: A + B + N<br>3 phase Δ, A + B + C, no N<br>3 phase Y, A + B + C + N                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 131              | R/W | NV | UInt   | Amps  |       | 1-32000            | CT Ratio – Primary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 132              | R/W | NV | UInt   |       |       | 1, 3               | CT Ratio – Secondary Interface (1 or 1/3 V, may not be user configurable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 133              | R/W | NV | UInt   |       | 100   | 0.01-320.00        | PT Ratio: The meter scales this value by 100 (i.e. entering 200 yields a potential transformer ratio of 2:1). The default is 100 (1.00:1), which is with no PT attached. Set this value before setting the system voltage (below)                                                                                                                                                                                                                                                                                                                                   |
| 134              | R/W | NV | UInt   |       |       | 82-32000           | System Voltage: This voltage is line to line, except for system type 10 which is line to neutral. The meter uses this value to calculate the full scale power for the analog outputs and pulse configuration (below), and as full scale for phase loss (register 142). The meter will refuse voltages that are outside the range of 82-660 volts when divided by the PT Ratio (above).                                                                                                                                                                              |
| 135              | R   | NV | UInt   | kW    | W     | 1-32767            | Theoretical Maximum System Power: This read-only value is the theoretical max. power the meter can expect to see on a service. This value is 100% of scale on the analog output (0-5VDC or 4-20mA), if equipped. The meter recalculates this value if the user changes the CT size, system type, or system voltage. This integer value has the same scale as other integer power registers (see register 140 for power scaling).                                                                                                                                    |
| 136              | R   |    | UInt   |       |       |                    | Reserved, always returns 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 137              | R/W | NV | UInt   |       |       | 0,1                | Display Units: 0 = IEC (U, V, P, Q, S), 1 = IEEE (default: VLL, VLN, W, VAR, VA)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Modbus Point Map (cont.)

| S4000-K Register | R/W | NV | Format | Units | Scale     | Range                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------|-----|----|--------|-------|-----------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 138              | R   |    | SInt   |       | -4 0.0001 |                                          | Scale Factor I (Current)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 139              | R   |    | SInt   |       | -3 0.001  |                                          | Scale Factor V (Voltage)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 140              | R   |    | SInt   |       | -2 0.01   |                                          | Scale Factor W (Power)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 141              | R   |    | SInt   |       | -1 0.1    |                                          | Scale Factor E (Energy)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                  |     |    |        |       | 0 1.0     |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                  |     |    |        |       | 1 10.0    |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                  |     |    |        |       | 2 100.0   |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                  |     |    |        |       | 3 1000.0  |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                  |     |    |        |       | 4 10000.0 |                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 142              | R/W | NV | UInt   | %     |           | 1-99                                     | Phase Loss Voltage Threshold in percent of system voltage (register 134). Default is 10 (%). Any phase (as configured in register 130) that drops below this threshold triggers a Phase Loss alert - i.e. if the System voltage is set to 480 V L-L, the L-N voltage for each phase should be 277 V. When the threshold is set to 10%, if any phase drops more than 10% below 277 V, (less than 249 V), or if any L-L voltage drops more than 10% below 480 V (less than 432 V) the corresponding phase loss alarm bit in register 146 will be true. |
| 143              | R/W | NV | UInt   | %     |           | 1-99                                     | Phase Loss Imbalance Threshold in Percent. Default is 25% phase to phase difference. For a 3-phase Y (3 + N) system type (40 in register 130), both Line to Neutral and Line to Line voltages are tested. In a 3-phase Δ System type (31 in register 130), only Line to Line voltages are examined. In a single split-phase (2 + N) system type (12 in register 130), just the line to neutral voltage are compared.                                                                                                                                 |
| 144              | R/W | NV | UInt   | Wh    |           | 10000,<br>1000,<br>100,<br>10            | Wh & VARh Energy per Pulse Output Contact Closure. If the meter cannot find a pulse duration that will keep up with the max. system power (register 135), it will reject the new value. Try a larger value.                                                                                                                                                                                                                                                                                                                                          |
| 145              | R   | NV | UInt   | ms    |           | 500,<br>250,<br>100,<br>50,<br>25,<br>10 | Pulse Contact Closure Duration in msec. Read-only. Set to the slowest duration that will keep up with the theoretical max. system power (register 135). The open time ≥ the closure time, so the max. pulse rate (pulses per sec) is the inverse of double the pulse time.                                                                                                                                                                                                                                                                           |
|                  |     |    |        |       |           |                                          | <p>Note: These registers contain a signed integer, which scales the corresponding integer registers. Floating point registers are not scaled. Scaling is recalculated when the meter configuration is changed.</p> <p>Phase Loss Output</p> <p>Note: The phases tested are determined by the System Type.</p> <p>kWh Pulse Contacts</p> <p>Note: The kWh pulse contact can keep up with a maximum power (Watts) of <math>1800000 \times \text{Wh pulse weight} \div \text{contact closure duration (in mses)}</math></p>                             |

## Modbus Point Map (cont.)

| S4000-K Register | R/W | NV | Format | Units   | Scale | Range       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------|-----|----|--------|---------|-------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 146              | R   |    | UInt   |         |       |             | Diagnostic Alert Bitmap. 1 = Active:<br>Bit 0: Phase A Voltage out of range<br>Bit 1: Phase B Voltage out of range<br>Bit 2: Phase C Voltage out of range<br>Bit 3: Phase A Current out of range<br>Bit 4: Phase B Current out of range<br>Bit 5: Phase C Current out of range<br>Bit 6: Frequency out of the range of 45 – 65 Hz OR there is insufficient voltage to determine frequency.<br>Bit 7: Reserved for future use<br>Bit 8: Phase Loss A<br>Bit 9: Phase Loss B<br>Bit 10: Phase Loss C<br>Bit 11: Low Power Factor on A with one or more phases having a PF less than 0.5 due to mis-wiring of phases<br>Bit 12: Low Power Factor on B<br>Bit 13: Low Power Factor on C<br>Bit 14: Energy pulse output overrun error. The pulse outputs are unable to keep up with the total real power (registers 3 and 261/262). To fix, increase the pulse energy register (register 144) and reset the energy accumulators (see reset register 129).<br>Bit 15: Energy pulse output configuration error (present pulse energy setting may not keep up with the theoretical max. system power; see register 135). To fix, increase the pulse energy (register 144). |
| 147              | R   | NV | UInt   |         |       | 0-32767     | Count of Energy Accumulator resets                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 148              | R   |    | UInt   |         |       |             | Reserved (returns 0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 149              | R/W | NV | UInt   |         |       | 1-6         | Number of Sub-Intervals per Demand Interval. Sets the number of sub-intervals that make a single demand interval. For block demand, set this to 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 150              | R/W | NV | UInt   | Seconds |       | 0, 10-32767 | Sub-Interval Length in seconds. For sync-to-comms, set this to 0 and use the reset register (129) to externally re-start the sub-interval.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 151              | R/W |    | UInt   |         |       | 1-32767     | Reserved (returns 0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 152              | R/W | NV | UInt   |         |       | 0-32767     | Power Up Counter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 153              | R   | NV | UInt   |         |       | 0-32767     | Output Configuration. Units have a N.O. (normally open) energy contact and N.C. (normally closed) (N.O. - Form A or N.C. - Form B) Phase Loss contact. While the relay used for the Phase Loss contact is N.C. (contacts are closed when the meter is not powered), closure indicates the presence of an alarm; either loss of phase, when the meter is powered, or loss of power when the meter is not. The contacts are open when the meter is powered and no phase alarm conditions are present.<br>3rd Output:<br>0 = RS-485<br>2 = VAR Pulse                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 154              | R   |    | UInt   |         |       |             | Reserved, returns 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 257/258          | R   | NV | Float  | kWh     |       |             | Real Energy Consumption (clear via reset register)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 259/260          | R   | NV | Float  | kWh     |       |             | Real Energy Consumption (clear via reset register)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 261/262          | R   |    | Float  | kW      |       |             | Total Instantaneous Real Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 263/264          | R   |    | Float  | kVAR    |       |             | Total Instantaneous Reactive Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 265/266          | R   |    | Float  | kVA     |       |             | Total Instantaneous Apparent Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 267/268          | R   |    | Float  | Ratio   |       | 0.0-1.0     | Total Power Factor (Total kW / Total kVA)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 269/270          | R   |    | Float  | Volt    |       |             | Voltage, L-L, Average of 3 Phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 271/272          | R   |    | Float  | Volt    |       |             | Voltage, L-N, Average of 3 Phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 273/274          | R   |    | Float  | Amp     |       |             | Current, Average of 3 Phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 275/276          | R   |    | Float  | kW      |       |             | Real Power, Phase A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 277/278          | R   |    | Float  | kW      |       |             | Real Power, Phase B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Modbus Point Map (cont.)

| S4000-K<br>Register | R/W | NV | Format | Units | Scale | Range             | Description                                                                                                                                                                                                                                                                                                                            |
|---------------------|-----|----|--------|-------|-------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 279/280             | R   |    | Float  | kW    |       |                   | Real Power, Phase C                                                                                                                                                                                                                                                                                                                    |
| 281/282             | R   |    | Float  | Ratio |       | 0.0-1.0           | Power Factor, Phase A                                                                                                                                                                                                                                                                                                                  |
| 283/284             | R   |    | Float  | Ratio |       | 0.0-1.0           | Power Factor, Phase B                                                                                                                                                                                                                                                                                                                  |
| 285/286             | R   |    | Float  | Ratio |       | 0.0-1.0           | Power Factor, Phase C                                                                                                                                                                                                                                                                                                                  |
| 287/288             | R   |    | Float  | Volt  |       |                   | Voltage, Phase A-B                                                                                                                                                                                                                                                                                                                     |
| 289/290             | R   |    | Float  | Volt  |       |                   | Voltage, Phase B-C                                                                                                                                                                                                                                                                                                                     |
| 291/292             | R   |    | Float  | Volt  |       |                   | Voltage, Phase A-C                                                                                                                                                                                                                                                                                                                     |
| 293/294             | R   |    | Float  | Volt  |       |                   | Voltage, Phase A-N                                                                                                                                                                                                                                                                                                                     |
| 295/296             | R   |    | Float  | Volt  |       |                   | Voltage, Phase B-N                                                                                                                                                                                                                                                                                                                     |
| 297/298             | R   |    | Float  | Volt  |       |                   | Voltage, Phase C-N                                                                                                                                                                                                                                                                                                                     |
| 299/300             | R   |    | Float  | Amp   |       |                   | Current, Instantaneous, Phase A                                                                                                                                                                                                                                                                                                        |
| 301/302             | R   |    | Float  | Amp   |       |                   | Current, Instantaneous, Phase B                                                                                                                                                                                                                                                                                                        |
| 303/304             | R   |    | Float  | Amp   |       |                   | Current, Instantaneous, Phase C                                                                                                                                                                                                                                                                                                        |
| 305/306             | R   |    | Float  |       |       |                   | Reserved, returns 0x7FC00000 (QNaN)                                                                                                                                                                                                                                                                                                    |
| 307/308             | R   |    | Float  | Hz    |       | 45.0-65.0         | Frequency (derived from Phase A)                                                                                                                                                                                                                                                                                                       |
| 309/310             | R   | NV | Float  | kVAh  |       |                   | Apparent Energy Consumption                                                                                                                                                                                                                                                                                                            |
| 311/312             | R   | NV | Float  | kVARh |       |                   | Reactive Energy Consumption                                                                                                                                                                                                                                                                                                            |
| 313/314             | R   |    | Float  | kVA   |       |                   | Apparent Power, Phase A                                                                                                                                                                                                                                                                                                                |
| 315/316             | R   |    | Float  | kVA   |       |                   | Apparent Power, Phase B                                                                                                                                                                                                                                                                                                                |
| 317/318             | R   |    | Float  | kVA   |       |                   | Apparent Power, Phase C                                                                                                                                                                                                                                                                                                                |
| 319/320             | R   |    | Float  | kVAR  |       |                   | Reactive Power, Phase A                                                                                                                                                                                                                                                                                                                |
| 321/322             | R   |    | Float  | kVAR  |       |                   | Reactive Power, Phase B                                                                                                                                                                                                                                                                                                                |
| 323/324             | R   |    | Float  | kVAR  |       |                   | Reactive Power, Phase C                                                                                                                                                                                                                                                                                                                |
| 325/326             | R   |    | Float  | kW    |       |                   | Total Real Power Present Demand                                                                                                                                                                                                                                                                                                        |
| 327/328             | R   |    | Float  | kVAR  |       |                   | Total Reactive Power Present Demand                                                                                                                                                                                                                                                                                                    |
| 329/330             | R   | NV | Float  | kVA   |       |                   | Total Apparent Power Present Demand                                                                                                                                                                                                                                                                                                    |
| 331/332             | R   | NV | Float  | kW    |       |                   | Total Real Power Max Demand                                                                                                                                                                                                                                                                                                            |
| 333/334             | R   | NV | Float  | kVAR  |       |                   | Total Reactive Power Max Demand                                                                                                                                                                                                                                                                                                        |
| 335/336             | R   | NV | Float  | kVA   |       |                   | Total Apparent Power Max Demand                                                                                                                                                                                                                                                                                                        |
| 337/338*            | R   |    | Float  |       |       | 0 -<br>4294967040 | Pulse Counter 1 (Real Energy)                                                                                                                                                                                                                                                                                                          |
| 339/340*            | R   |    | Float  |       |       | 0 -<br>4294967040 | Contact Closure Counters. Valid for both Pulse inputs and outputs. Series 4000 counts are shown in (). See register 144 (Energy per Pulse) for the Wh per pulse count. Clear via register 129. Inputs are user defined. These values are derived from the 32 bit integer counter and will roll over to 0 when the integer counters do. |
| 341/342*            | R   | NV | Float  | kWh   |       |                   |                                                                                                                                                                                                                                                                                                                                        |
| 343/344*            | R   | NV | Float  | kWh   |       |                   |                                                                                                                                                                                                                                                                                                                                        |
| 345/346*            | R   | NV | Float  | kWh   |       |                   |                                                                                                                                                                                                                                                                                                                                        |

Invalid or Quiet Not A Number (QNaN) conditions are indicated by 0x8000 (negative zero) for 16 bit integers and 0x7FC00000 for 32 bit floating point numbers.

Floating point numbers are encoded per the IEEE 754 32-bit specifications.

\* Points 337/338 through 345/346 are not available on units with firmware versions 1.018 or earlier.

## Troubleshooting

| Problem                                                              | Cause                                                  | Solution                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The maintenance wrench icon appears in the power meter display.      | There is a problem with the inputs to the power meter. | See the Alert sub-menu or the Diagnostic Alert Modbus Register 146                                                                                                                                                                                                                                        |
| The display is blank after applying control power to the meter.      | The meter is not receiving adequate power.             | Verify that the meter control power are receiving the required voltage.<br>Verify that the heart icon is blinking.<br>Check the fuse.                                                                                                                                                                     |
| The data displayed is inaccurate.                                    | Incorrect setup values                                 | Verify the values entered for power meter setup parameters (CT and PT ratings, system type, etc.). See the Setup section.                                                                                                                                                                                 |
|                                                                      | Incorrect voltage inputs                               | Check power meter voltage input terminals to verify adequate voltage.                                                                                                                                                                                                                                     |
|                                                                      | Power meter is wired improperly.                       | Check all CTs and PTs to verify correct connection to the same service, PT polarity, and adequate powering. See the Wiring Diagrams section for more information.                                                                                                                                         |
| Cannot communicate with power meter from a remote personal computer. | Power meter address is incorrect.                      | Verify that the meter is correctly addressed (see Setup section).                                                                                                                                                                                                                                         |
|                                                                      | Power meter baud rate is incorrect.                    | Verify that the baud rate of the meter matches that of all other devices on its communications link (see Setup section).                                                                                                                                                                                  |
|                                                                      | Communications lines are improperly connected.         | Verify the power meter communications connections (see the Communications section).<br>Verify the terminating resistors are properly installed on both ends of a chain of units. Units in the middle of a chain should not have a terminator.<br>Verify the shield ground is connected between all units. |

## China RoHS Compliance Information (EFUP Table)

| 部件名称                                                                                                                  | 产品中有害有毒物质或元素的名称及含量Substances |        |        |              |            |              |
|-----------------------------------------------------------------------------------------------------------------------|------------------------------|--------|--------|--------------|------------|--------------|
|                                                                                                                       | 铅 (Pb)                       | 汞 (Hg) | 镉 (Cd) | 六价铬 (Cr(VI)) | 多溴联苯 (PBB) | 多溴二苯醚 (PBDE) |
| 电子线路板                                                                                                                 | X                            | 0      | 0      | 0            | 0          | 0            |
| 0 = 表示该有害有毒物质在该部件所有均质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。<br>X = 表示该有害有毒物质至少在该部件的某一均质材料中的含量超出SJ/T11363-2006标准规定的限量要求。 |                              |        |        |              |            |              |
| Z000057-0A                                                                                                            |                              |        |        |              |            |              |