

100/200/400/600A MEDIUM SPLIT CORE CURRENT TRANSFORMERS



Split-core current transformers provide linear output voltage that is directly proportional to the input current. These transformers are safely and easily installed over existing electrical power lines without disconnecting the lines or interrupting service.

DENT's energy monitoring components are used for a variety of applications including building automation, tenant submetering, performance verification, energy management, and new technology assessment.

KEY SPECIFICATIONS

Window Size	1.25" (3.20 cm)
Current Range	100A Model: 5 - 130A AC 200A Model: 4 - 260A AC 400A Model: 8—520A AC 600A Model: 12—780A AC
Output	333 mV at rated current
Ratio Error*	<1% at rated current (typical)
Phase Error*	<2° at rated current (typical)

*IEEE C57.13 Certification available upon request.

ELECTRICAL

Output	333 mV at rated current
Wire Polarity	White = Hi, positive (+) Black = Low, negative (-)
Frequency Range	50 to 400 Hz

MECHANICAL


Case Material	Epoxy encapsulated housing
Leads	2.7 M (8'), twisted pair, 20 AWG
Operating Temperature	-20° to 55°C (-4° to 131°F)

SAFETY

Working Voltage	600 VAC, Category III
Dielectric Strength	5000 VAC around case 600V rated leads
Certification	Conforms to: UL STD 61010-1 EN 60044-1 Certified to: CAN/CSA STD C22.2 No. 61010-1



DENT P/N	NOMINAL RATING (Amps)	USEFUL CURRENT RANGE (Amps)	DIMENSIONS				
			A	B	C	D	E
CT-SCM-0100	100	5 - 130A AC	8.26 cm	8.51 cm	2.54 cm	3.18 cm	3.18 cm
CT-SCM-0200	200	4 - 260A AC	(3.25")	(3.35")	(1.00")	(1.25")	(1.25")
CT-SCM-0400	400	8—520A AC					
CT-SCM-0600	600	12—780A AC					

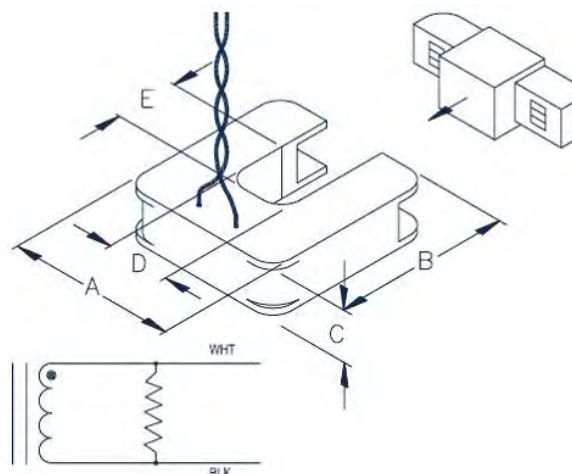

PART NUMBERS

CT-SCM-0100-U/B	100A Medium Split Core
CT-SCM-0200-U/B	200A Medium Split Core
CT-SCM-0400-U/B	400A Medium Split Core
CT-SCM-0600-U/B	600A Medium Split Core

All specifications contained in this document are subject to change without notice.
© DENT INSTRUMENTS, INC.
rev041014