



CURRENT TRANSFORMERS

SPLIT CORE CURRENT TRANSFORMERS

MODEL FCL

CURRENT TRANSFORMERS

FLEX-CORE® Circular Models

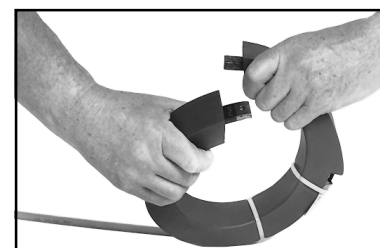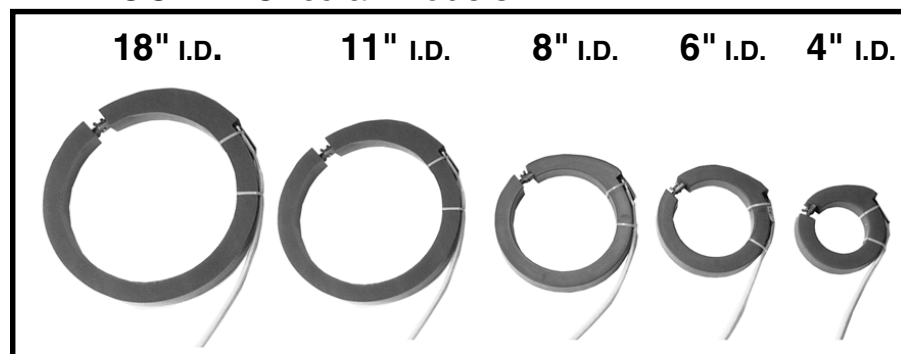

Note:
Open split-core with a
twisting motion only.

FEATURES

This split-core current transformer was designed for easy installation on large bus or wire conductors in order to make electrical load surveys or for continuous monitoring of current.

SPECIFICATIONS

Construction

Directional silicon steel is used for the flexible core. Secondary windings are of copper. Unit is encapsulated in silicone rubber which protects against moisture, dirt, oil and corona.

Insulation Level 0.72KV, BIL 10KV Full Wave

Frequency 50-400Hz

Thermal Factor 1.25 at 30°C., 1.0 at 55°C.

Operating Temp Range -45°C to +55°C

Altitude Up to 4000 Meters

ACCURACY 200:5 thru 300:5 4%
 400:5 thru 500:5 3%
 600:5 thru 800:5 2%
 1000:5 thru 6000:5 1%

Secondary Leads 12 Ft. with spade connectors
 Custom lead lengths are available.

Color Transformer (red) - Leads (yellow)

Remains flexible from -45° to +200° C.


Meets IEC 60044-1 Standards

APPLICATIONS

For use with any 5 Amp Indicating or Recording Ammeter or Amp or Watt Transducer. Other applications include:

- Watt Transducer
- Current Transducer
- KWH Meter
- Demand Meter
- Power Factor Meter
- Current Sensing Relays
- Energy Management Systems

FLEX-CORE® Rectangular Models

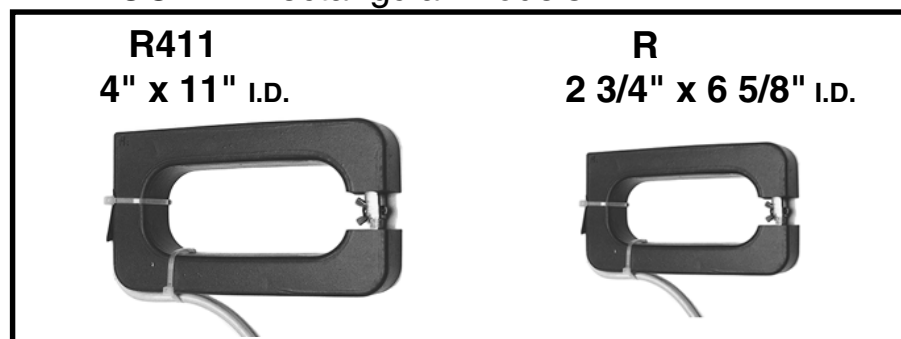

Note:
Open split-core with a
twisting motion only.

- Most Ratios Stocked
- Seven Opening Sizes
- Other Ratios Available
- 1 or 5 Amp Secondaries
- 0-.333V or 1.0V Secondaries
- Custom Inserts Available

UL® File No. E186575

CE



ORDERING INFORMATION

FCL X X X X / X - X

RATIO

I.D.

-4 -6 -8 -11 -18 -R -R411

Example: 1000A Split-Core with
6" Inside Diameter

FCL1000/5-6

CURRENT TRANSFORMERS

SPLIT CORE CURRENT TRANSFORMERS



MODEL FCL

CURRENT TRANSFORMERS

CURRENT RATIO	INSIDE DIAMETER							BURDEN CAPACITY	ACCURACY
	ROUND					RECTANGLE			
	4"	6"	8"	11"	18"	-R	-R411		
200/5	X	-	-	-	-	-	-	2VA	4%
250/5	X	-	-	-	-	-	-	2VA	4%
300/5	X	X	-	-	-	-	-	2VA	4%
400/5	X	X	-	-	-	X	-	2VA	3%
500/5	X	X	-	-	-	X	-	3VA	3%
600/5	X	X	-	-	-	X	-	5VA	2%
800/5	X	X	-	-	-	X	-	5VA	2%
1000/5	X	X	X	-	-	X	-	5VA	1%
1200/5	X	X	X	-	-	X	-	5VA	1%
1500/5	X	X	X	X	-	X	X	15VA	1%
1600/5	X	X	X	X	-	X	X	15VA	1%
2000/5	X	X	X	X	X	X	X	25VA	1%
2400/5	-	X	X	X	X	X	X	30VA	1%
2500/5	-	X	X	X	X	X	X	35VA	1%
3000/5	-	X	X	X	X	X	X	45VA	1%
3500/5	-	X	X	X	X	X	X	45VA	1%
4000/5	-	X	X	X	X	X	X	45VA	1%
5000/5	-	-	X	X	X	-	X	45VA	1%
6000/5	-	-	-	X	X	-	X	45VA	1%

AVERAGE WEIGHT	4"	6"	8"	11"	18"	(R) 2 3/4"x6 5/8"	(R411) 4"x11"
	3.5 lbs.	4.25 lbs.	5.5 lbs.	7.5 lbs.	17 lbs.	4.25 lbs.	6.25 lbs.

DIMENSIONS

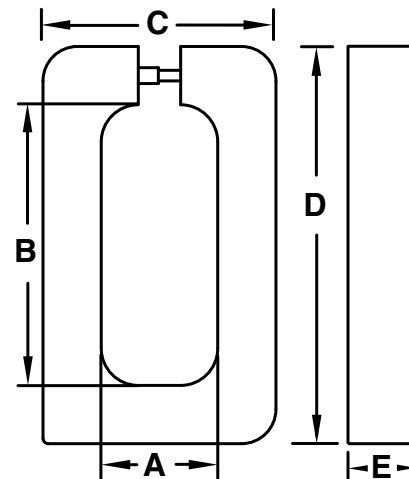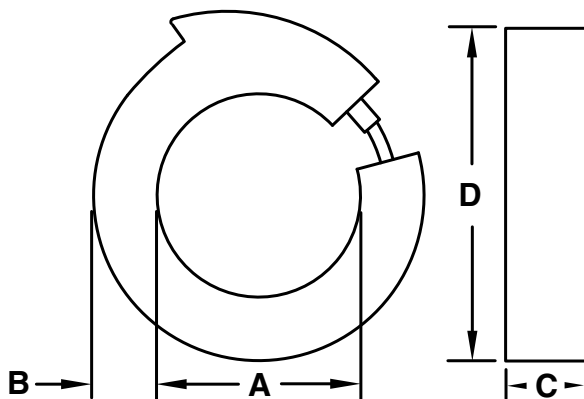

INSIDE DIAMETER	CIRCULAR				
A	B	C	D	MODEL	
4	1 1/4	1 1/2	6 1/2	-4	
6	1 1/4	1 1/2	8 1/2	-6	
8	1 1/4	1 1/2	10 1/2	-8	
11	1 1/4	1 1/2	13 1/2	-11	
18	1 1/4	1 1/2	20 1/2	-18	

INSIDE DIAMETER	RECTANGULAR					
A	B	C	D	E	MODEL	
2 3/4	6 5/8	5 1/2	9 3/8	1 1/2	-R	
4	11	6 1/2	13 3/8	1 1/2	-R411	
All Dimensions In Inches Black Wire = X1 (S1) White Wire = X2 (S2)						