

# Dual Room miniZ™ Intelligent Daylight Management System

Independently control two individual rooms with one compact device

## Description

The dual room miniZ™ allows two individual rooms to be independently controlled (single zone for each room) and offers the same performance features as the popular miniZ™ with a compact, versatile, cost-effective, code-compliant approach to daylight harvesting. This self-contained, self-configuring intelligent daylight management system meets a wide variety of commercial lighting needs, from basic switching to dual room/single zone per room daylight harvesting. It combines daylight harvesting, occupancy sensing, and flexible lighting control functions into a single, easily installed package. Providing install-and-forget convenience, the dual room miniZ™ features several methods of ladderless commissioning; one of which is the AutoCal feature, the first self-calibrating daylight harvesting system. The performance features and capabilities of the dual room miniZ™ provides an optimal package that surpasses any other daylight management system.

## Features

- Two individual room control (single zone for each room) combining separate daylight harvesting, occupancy sensors, and switching in one compact box
- Ladderless Commissioning™ provides install-and-forget convenience
- Autocal™ setting automatic photocell calibration
- Automatic closed loop setting (one zone per room) daylight control
- Automatic Correction setting for Light Loss Factor (LLF) recognizes and corrects for Lumen Maintenance Issues
- Simplified daylight harvesting with 3% to 100% dimming capabilities (0-10V fluorescent dimming ballasts required)
- Automatic Daylight Harvest Mode provides optimum lighting output for additional energy savings potential
- Convenient two occupancy sensor and two photocell integration
- Daylight switching, full range 0-10V dimming and network models available
- Cost effective energy code compliance
- Simplified integration with emergency and building automation systems
- Accepts external time clock inputs
- Closed loop or open loop daylight control
- Isolated contacts for HVAC relay



## Dimensions

- 6.65"L x 6.65"H x 2.1"D
- Shipping Weight: 4lbs.
- Unit Weight: 3.3lbs.
- 1/2" & 3/4" conduit knockouts
- 1/2" nipple with pigtails for easy wire connections


## Agency Standards and Compliance

- UL and cUL Listed
- CEC Title-24 Listed
- Backed by Limited Five-Year Warranty

**Leviton Manufacturing. Co., Inc. Lighting & Energy Solutions**

©2013 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Dual Room miniZ™

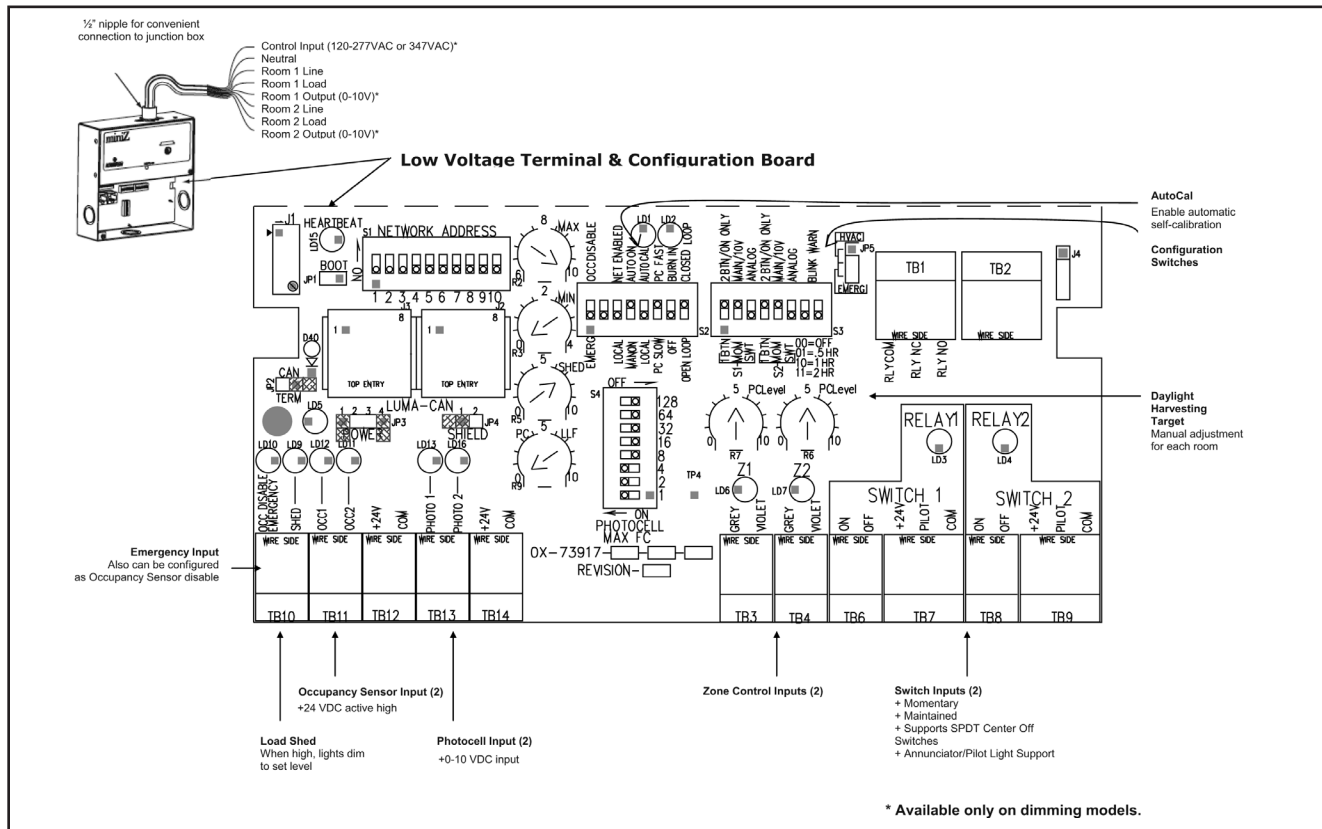

## Load Ratings

- 20A per relay, 120/277V
- 15A per relay, 347V
- Fluorescent, non-dimmed and 0-10V dimmed
- 120mA power output for operation of occupancy sensors, etc.

## Power

- Input Power: 120, 277, or 347V\*; 10w Max, 50/60Hz
- Output Power: 2 circuits, up to 277V, 20A, or 2 circuits, up to 347V, 15A
- Output 0-10V Control: 0 or 2\*
- Available Peripheral Power: 120mA, 24V

## Ordering Information

| Cat. No.  | Description                                     | 0-10V Outputs | Relay Outputs |
|-----------|-------------------------------------------------|---------------|---------------|
| MZB02-102 | miniZ™ Basic, Dual Room, 2 Relay, 120V - 277V   | 0             | 2             |
| MZD22-102 | miniZ™ Dimming, Dual Room, 2 Relay, 120V - 277V | 2             | 2             |
| MZB02-C02 | miniZ™ Basic, Dual Room, 2 Relay, 347V          | 0             | 2             |
| MZD22-C02 | miniZ™ Dimming, Dual Room, 2 Relay, 347V        | 2             | 2             |

## Leviton Manufacturing Co., Inc. Lighting & Energy Solutions

©2013 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-7E17R/A12-TR